



victron energy
B L U E P O W E R

Phoenix Inverter

Phoenix Inverter

SinusMax - Superior engineering

Developed for professional duty, the Phoenix range of inverters is suitable for the widest range of applications. The design criteria have been to produce a true sine wave inverter with optimised efficiency but without compromise in performance. Employing hybrid HF technology, the result is a top quality product with compact dimensions, light in weight and capable of supplying power, problem-free, to any load.

Extra start-up power

A unique feature of the SinusMax technology is very high start-up power. Conventional high frequency technology does not offer such extreme performance. Phoenix inverters, however, are well suited to power up difficult loads such as refrigeration compressors, electric motors and similar appliances. The 24/800 model, for example, is capable of starting a typical refrigerator.

Virtually unlimited power thanks to parallel and 3-phase operation capability

Up to 6 units Phoenix 24/3000 can operate in parallel to achieve higher power output. Six 24/3000 units, for example, will provide 15 kW / 18 kVA output power. Operation in 3-phase configuration is also possible.

To transfer the load to another AC source: the automatic transfer switch

If an automatic transfer switch is required on models rated at 1200 VA or more, we recommend to use the Phoenix Multi instead. The switch is included in these products and the charger function of the Multi can be disabled. For our lower power models we recommend the use of our Filax Automatic Transfer Switch. Computers and other electronic equipment will continue to operate without disruption because both the Filax and the Phoenix Multi feature a very short switchover time (less than 20 milliseconds).

Computer interface


All models rated at 1600 VA or more have a RS-485 computer interface. All you need to connect to your PC is our data link MK1b (see under accessories). This data link takes care of galvanic isolation between the inverter and the computer, and converts from RS-485 to RS-232. Together with the [VEConfigure](#) software, which can be downloaded free of charge from our website www.victronenergy.com, all parameters of the inverters can be customised. This includes output voltage and frequency, over and under voltage settings and programming the relay. This relay can for example be used to signal several alarm conditions, or to start a generator.

The inverters can also be connected to [VENet](#), the new power control network of Victron Energy, or to other computerised monitoring and control systems.

New applications of high power inverters

The possibilities of paralleled high power inverters are truly amazing. For ideas, examples and battery capacity calculations please refer to our book "[Electricity on board](#)" (available free of charge from Victron Energy and downloadable from www.victronenergy.com).

Application example

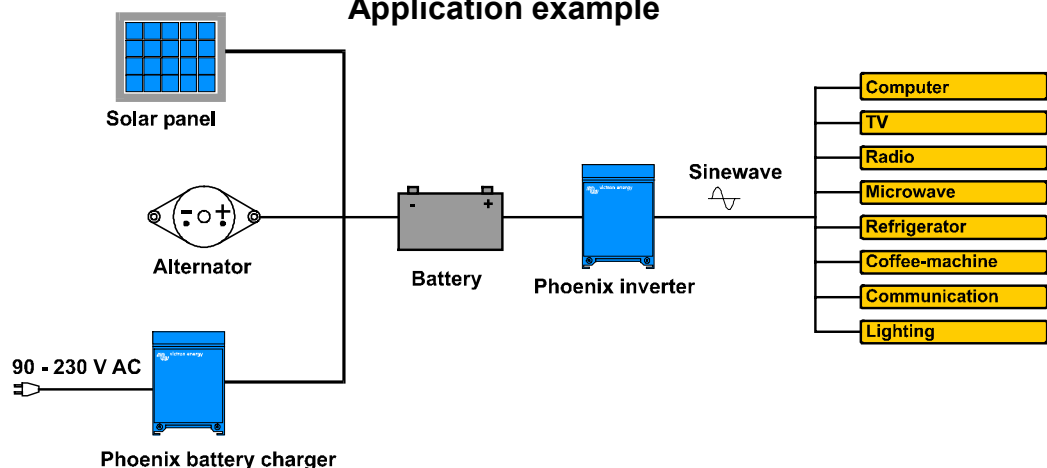



Specifications


Phoenix Inverter

Phoenix inverter	12 Volt 24 Volt 48 Volt	12/220 24/220 48/220	12/300 24/350	12/600 24/800	12/1600 (5) 24/1600 (5) 48/1600 (5)	12/2500 (5) 24/3000 (5) 48/3000 (5)
Input voltage range (V DC)		10,5 - 15,5 21,0 - 31,0 42,0 - 62,0	10,5 - 15,5 21,0 - 31,0	10,5 - 15,5 21,0 - 31,0	9,5 - 16,0 19,5 - 33,0 38,0 - 66,0	9,5 - 16,0 19,5 - 33,0 38,0 - 66,0
Cont. output power at 25 °C (VA) (6)		220 220 220	300 350	600 800	1600 1600 1600	2500 3000 3000
Cont. power at 25 °C / 40 °C (W)		175 / 150 175 / 150 175 / 150	225 / 215 300 / 275	500 / 450 650 / 600	1300 / 1200 1300 / 1200 1300 / 1200	2000 / 1600 2500 / 2000 2500 / 2000
Peak power (W)		400 400 400	500 600	900 1500	2300 2300 2300	4500 6000 6000
Max. efficiency 12 / 24 / 48 V (%)		90 / 90 / 92	90 / 91	92 / 94	93 / 94 / 95	93 / 94 / 95
Zero-load power 12 / 24 / 48 V (W)		0,5 / 0,8 / 0,8	3,5 / 4,5	0,7 / 0,7	4,5 / 6,0 / 7,0	4,5 / 6,0 / 7,0
Multi purpose relay					yes	yes
Protection (4)		a,b,d,h	a,b,d,h	a,b,d,h	a - h	a - h
Common Characteristics (2,3)		Output: 230 V ± 2% / 50 Hz ± 0,2% Operating temperature range: 0 - 50°C (fan assisted cooling) Humidity (non condensing) : max 95%				
ENCLOSURE						
Material & Colour	aluminium (blue Ral 5012)					
Battery-connection	1)	1)	1)	M8 studs	M8 studs	
230 V AC-connection	IEC-320	IEC-320	IEC-320	screw-clamp 2,5mm ²	screw-clamp 2,5mm ²	
Protection category	IP 20	IP 20	IP 20	IP 21	IP 21	
Weight (kg)	2,1	3,3	6,5	12	18	
Dimensions (hxxwx d in mm)	73x110x210	90x150x176	107x187x227	362x258x218	362x258x218	
ACCESSORIES						
Remote panel (RS 485 port)				√ (PIV)	√ (PIV)	
Remote on-off switch				√	√	
Automatic transfer switch	Filax	Filax	Filax	Phoenix Multi	Phoenix Multi	
STANDARDS						
Safety	EN 60950	EN 60950	EN 60950	EN 60335-1	EN 60335-1	
Emission / Immunity	EN 50081-1, EN55014 / EN 55014-2					
Automotive Directive				95/54/EC	95/54/EC	

- 1) Battery cables of 1.5 meter
- 2) 115 V AC on request
- 3) 60 Hz on request
- 4) Protection
 - a. Output short circuit
 - b. Overload
 - c. Battery voltage too high
 - d. Battery voltage too low
 - e. Battery reverse polarity detection
 - f. 230 V AC on inverter output
 - g. Input voltage ripple too high
 - h. Temperature too high

- 5) Suitable for parallel and 3-phase operation
- 6) Non linear load, crest factor 3:1

Five parallel units: output power 12,5 kW

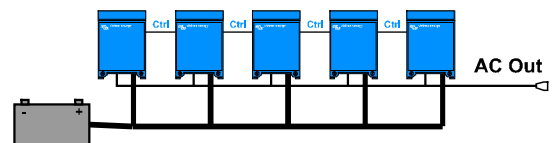

Accessories



Battery Alarm

An excessively high or low battery voltage is indicated by an audible and visual alarm, and a relay for remote signalling.



Phoenix Inverter Control (PIV)

This panel is intended for the models equipped with a RS-485 data port. It can also be used on a Phoenix Multi when an automatic transfer switch but no charger function is desired. The brightness of the LED's is automatically reduced during night time.



Computer controlled operation and monitoring (Victron Interface MK1b)

All models rated at 1600 VA or more are ready to communicate with a computer through a RS-485 data port. All you need to link to your PC and be able to set and read out all parameters is the data link as shown and software available on our website.

Moreover, all Victron Energy product equipped with a RS-485 data port can easily be integrated in VENet, the new power control network of Victron Energy, or to other computerised monitoring and control systems.



BMV-501 Battery Monitor

The BMV – 501 Battery Monitor features an advanced microprocessor control system combined with high resolution measuring systems for battery voltage and charge/discharge current. Besides this, the software includes complex calculation algorithms, like Peukert's formula, to exactly determine the state of charge of the battery. The BMV – 501 selectively displays battery voltage, current, consumed Ah or time to go. The monitor also stores a host of data regarding performance and use of the battery.